



LTV15RS 15" LED Backlight LCD
LTV19RS 19" LCD



- Compatible with VGA (640 x 480), SVGA (800 x 600), XGA (1024 x 768), SXGA (1280 x 1024)* resolution
- Built-in RS-485 function
- Video input HDMI x1 / BNC x 1 / VGA x 1
- Video output BNC x1
- Audio input RCA x2 / phone jack x 1
- Eco-friendly concept with LED backlight: Saves energy & power*
- Picture-In-Picture feature
- High brightness level & contrast ratio with super wide viewing angle
- Built-in speaker x2
- Built-in 3D comb filter and 3D de-interlace for crisp picture quality
- Fast response time & refresh rate without time lagging
- VESA standards (100mm x 100mm) bracket

* Only available for **LTV19RS**

* Only available for **LTV15RS**

15" / 19"

LCD Monitor


SPECIFICATIONS

FC CE RoHS Made in Taiwan

Model	LTV15RS	LTV19RS
Screen Size	15-inch	19-inch
LED Backlight	Yes	No
Button Control	Power / OSD Control / Source	
Display Resolution	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75 1024 x 768 @ 60/70/75	640 x 480 @ 60/72/75 800 x 600 @ 56/60/72/75 1024 x 768 @ 60/70/75 1280 x 1024 @ 60/75
Active Area	304.1(H) x 228.1(V) mm	376.32(H) x 301.056(V) mm
LCD Panel Type	TN mode, Normally white	
Dot Pitch	0.297(H) x 0.297(V) mm	0.294(H) x 0.294(V) mm
Display Ratio	4:3	5:4
Display Color	16.2M colors	16.7M colors
Brightness (Central)	350 cdm2	250 cd/m2
Contrast Ratio	700:1	1000:1
Viewing Angle	Left 70° / Right 70° / Up 60° / Down 65° CR>10	Left 85° / Right 85° / Up 75° / Down 55° CR>10
Response Time	12ms	5ms
Input Voltage	12V DC	
Input Signal	1Vp-p composite video	
Input Impedance	75 ohms	
Output Signal	1.0Vp-p ± 0.2Vp-p composite video (Auto Termination)	
Scanning System	NTSC: 525 lines, 60 fields/sec ; PAL: 625 lines, 50 fields/sec	
Video Input/Output	HDMI x1, Video In x1 (BNC), Video Out x1 (BNC), VGA x1	
Audio Input	RCA jack x2 (L/R), PC-Audio In x1	
RS-485 Jack	Built-in, Pin Jack x2, +/-	
Protocol	Pelco-P / Pelco-D / Customized Protocol	
Control Device	Operate PTZ dome or camera / DVR and monitor group management by remote controller	
Control ID	PTZ dome or camera 1~255 / DVR 1~255 / Monitor 1~255	
Speaker	1W + 1W	
Power Consumption	30W	45W
Operating Temperature	14°F~122°F / -10°C~50°C	
Storage Temperature	-4°F~140°F / -20°C~60°C	
Dimension	13.38(W) x 13.56(H) x 2.11(D) inches 339.9(W) x 344.5(H) x 53.5(D) mm	46.54(W) x 15.72(H) x 2.12(D) inches 420(W) x 339.5(H) x 53.8(D) mm
Weight	6.17 lbs / 2.8 kg	9.04 lbs / 4.1 kg

*Specifications and appearance are subject to change without notice

DIMENSIONS

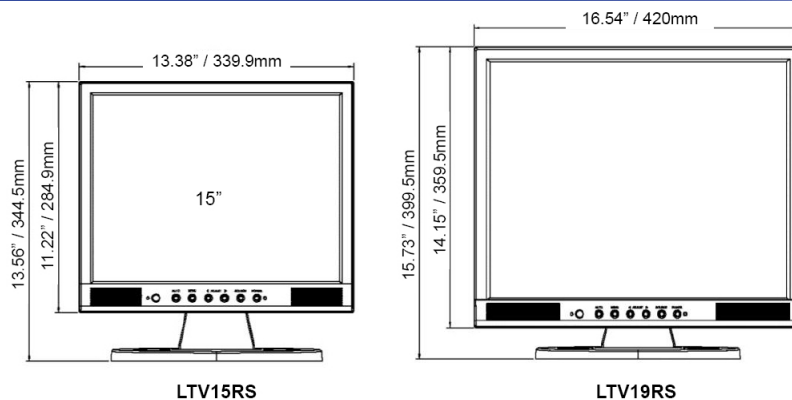

LTV15RS

LTV19RS