

OKINA USA

PTZ
SERIES

SEMW36HB-VT53DN




Sony Zoom Module

TRUE
DN

- 1/4" Sony Exview HAD CCD, Sony Zoom Module
- 530 TV Lines, Wide Dynamic Range
- 36x Optical Zoom, 12x Digital Zoom (432x)
- 3.4mm~122.4mm Tamron Lens / F1.6~F4.5
(Lens Made in Japan)
- Day: 1.4 Lux (1/50), 0.1 Lux (1/3) / Night: 0.01 Lux (1/3)
- Mechanical IR Cut Filter – ICR
- Pan Speed: 0.4° ~ 300° per sec. / Pan Range: 360°
- Tilt Speed: 0.4° ~ 150° per sec. / Tilt Range: 0° ~ 90°
- 4 Programmable Tours w/ Max. 24 Presets, up to 180s
- RS485, Baud Rate 2400bps, 4800bps, 9600bps
- Auto Search & Track on Moving Objects
- Up to 4 Alarm Inputs
- 0~255 Addresses, Pelco D/P Protocols
- 24V AC

Ceiling Mount



IR Cut Filter – ICR

PAL Version also available

36x Wide Dynamic High Speed

Tracking PTZ Dome Camera




SPECIFICATIONS

FC CE RoHS Made in Taiwan

Model	SEMW36HB-VT53DN
Signal Format	NTSC
Image Sensor	1/4" Sony Exview HAD CCD
Resolution / DSP	530 TV Lines, Wide Dynamic Range / Sony
Video Signal	1.0V p-p (Sync Negative), Y/C Output
Scanning System	Progressive
Minimum Illumination	Day: 1.4 Lux (1/50), 0.1 Lux (1/3) ; Night: 0.01 Lux (1/3)
Mechanical IR Cut Filter (ICR)	Yes
Zoom	36x Optical Zoom / 12x Digital Zoom
Lens	3.4mm~122.4mm Tamron Lens / F1.6~F4.5 (Made in Japan)
View Angle	48° (Wide End) / 2.8° (Tele End)
S/N Ratio	More than 50dB
Focus	Auto / Manual
White Balance	Auto / Manual (ATW, Indoor, Outdoor, One Push WB, Manual WB)
Electronic Shutter Speed	1 ~ 1/10,000 sec.
Iris Control	Auto / Manual / Auto Slow Shutter
Gain Control	Auto / Manual (-3 to 28dB, 2dB steps, 16 steps)
Pan Speed / Pan Range	0.4° ~ 300° per sec. / 360°
Tilt Speed / Tilt Range	0.4° ~ 150° per sec. / 0° ~ 90°
Communication	RS485, Multiple Protocol, Coax
Preset Positions	128 Presets
Auto Pan	Yes, between 2 presets
Tour / Sequence	4 Programmable Tours with Max. 24 Presets / 4 Patterns up to 180s
Alarm Input	Up to 4 Alarm Inputs
Mount Option	Wall or Ceiling
Heater & Blower	Built-in
Power	24V AC / 24~60VA (Outdoor)
Operating Temperature	-40°F ~ 140°F / -40°C ~ 60°C (Outdoor)
Dimension	6.56(Ø) x 10.5(H) inches / 200(Ø) x 320(H) cm

*Specifications and appearance are subject to change without notice.

Auto Tracking Screen Captures

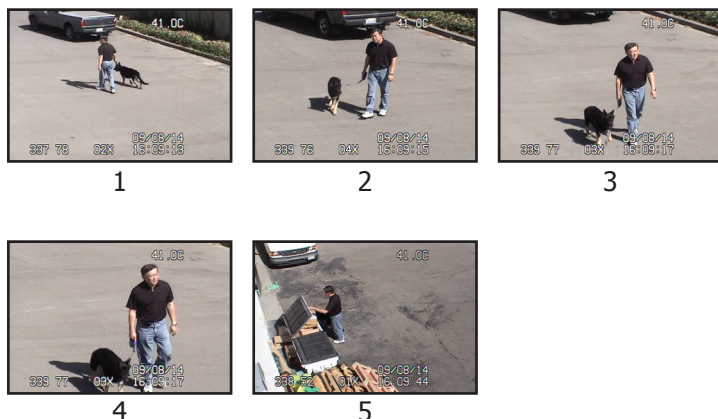

Dimensions (cm)

